




Big Bang MTB 29" Geometry



Classic



V design

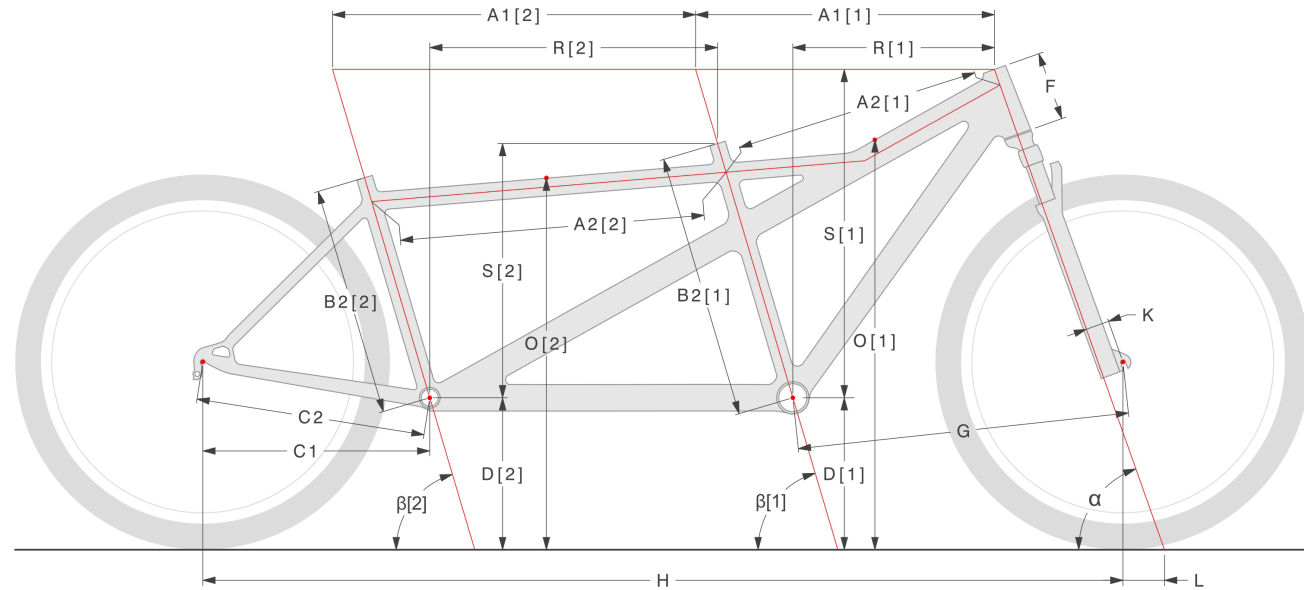

Wheels 29"

Frame design	Frame size [1]/[2]		Typical Rider Height		Effective Top Tube Length	Actual Top Tube Length	Seat Tube Length to Top	Effective Chainstay Length	Actual Chainstay Length	Bottom Bracket Height	Head Tube Length	Front Center Distance	Wheelbase	Fork Rake	Trail	StandOver Midpoint	Reach	Stack	Head Tube Angle	Seat Tube Angle
	cm	inch	VP[1] (cm)	VP[2] (cm)	A1[1]/[2] (mm)	A2[1]/[2] (mm)	B2[1]/[2] (mm)	C1 (mm)	C2 (mm)	D[1]/[2] (mm)	F (mm)	G (mm)	H (mm)	K (mm)	L (mm)	O[1]/[2] (mm)	R[1]/[2] (mm)	S[1]/[2] (mm)	α (deg)	β[1]/[2] (deg)
V design	44/38	17,3/15,0	165-171	149-156	586/686	571/674	440/380	445	450	300/300	125	668	1795	46	88,5	773/660	406/565	628/423	69,5	74,0/74,0
V design	46/40	18,1/15,7	172-176	157-161	595/686	577/674	460/400	445	450	300/300	125	677	1804	46	88,5	771/679	415/559	628/442	69,5	74,0/74,0
V design	46/44	18,1/17,3	172-176	167-171	595/712	577/709	460/440	445	450	300/300	125	677	1830	46	88,5	774/700	415/585	628/442	69,5	74,0/74,0
V design	48/42	18,9/16,5	177-181	162-166	608/686	586/676	480/420	445	450	300/300	125	684	1817	46	88,5	770/698	422/556	628/460	69,5	73,5/74,0
V design	48/46	18,9/18,1	177-181	172-176	608/712	586/712	480/460	445	450	300/300	125	684	1843	46	88,5	772/718	422/582	628/460	69,5	73,5/74,0
V design	50/44	19,7/17,3	182-186	167-171	620/712	597/702	500/440	445	450	300/300	125	690	1850	46	85,0	773/717	433/576	631/479	70,0	73,5/74,0
V design	50/48	19,7/18,9	182-186	177-181	620/739	597/739	500/480	445	450	300/300	125	690	1877	46	85,0	775/738	433/603	631/479	70,0	73,5/74,0
V design	52/46	20,5/18,1	187-191	172-176	633/725	609/715	520/460	445	450	300/300	135	704	1877	46	85,0	780/736	443/583	640/499	70,0	73,5/74,0
V design	52/50	20,5/19,7	187-191	182-186	633/739	609/736	520/500	445	450	300/300	135	704	1885	46	85,0	780/756	443/591	640/499	70,0	73,5/73,5
V design	54/46	21,3/18,1	192-196	172-176	645/725	621/711	540/460	445	450	300/300	145	716	1889	46	85,0	808/745	453/578	649/518	70,0	73,5/74,0
V design	54/50	21,3/19,7	192-196	182-186	645/739	621/731	540/500	445	450	300/300	145	716	1897	46	85,0	792/765	453/586	649/518	70,0	73,5/73,5

* [1] - pilot, [2] - stoker

© DURATEC GeoVersion 16.1