
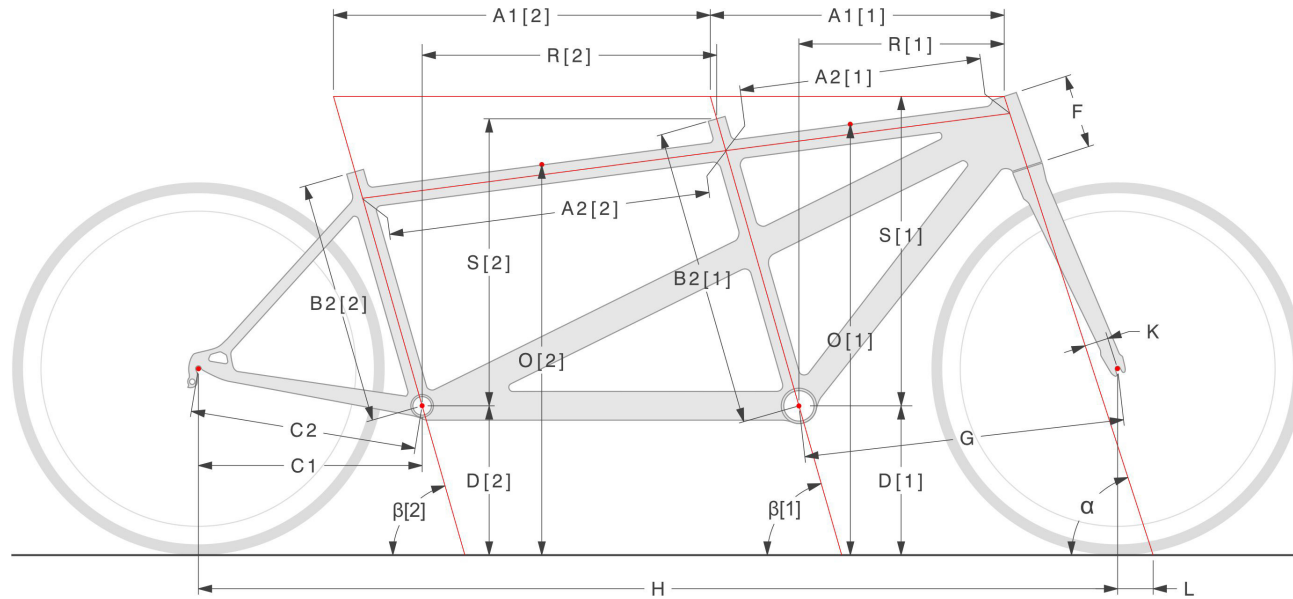


Big Bang Road Geometry



Wheels 25-622 (700x25C)

Frame design	Frame size [1]/[2]		Typical Rider Height	Typical Rider Height	Effective Top Tube Length	Actual Top Tube Length	Seat Tube Length to Top	Effective Chainstay Length	Actual Chainstay Length	Bottom Bracket Height	Head Tube Length	Front Center Distance	Wheelbase	Fork Rake	Trail	StandOver Midpoint	Reach	Stack	Head Tube Angle	Seat Tube Angle
	cm	inch	VP[1] (cm)	VP[2] (cm)	A1[1]/[2] (mm)	A2[1]/[2] (mm)	B2[1]/[2] (mm)	C1 (mm)	C2 (mm)	D[1]/[2] (mm)	F (mm)	G (mm)	H (mm)	K (mm)	L (mm)	O[1]/[2] (mm)	R[1]/[2] (mm)	S[1]/[2] (mm)	α (deg)	β [1]/[2] (deg)
V design	50/46	19,7/18,1	157-164	149-151	529/686	513/679	500/460	405	411	270/270	125	583	1670	43	64,3	724/699	376/552	551/482	72,0	74,5/74,5
V design	50/48	19,7/18,9	157-164	152-156	529/686	513/683	500/480	405	411	270/270	125	583	1670	43	64,3	717/709	376/552	551/482	72,0	74,5/74,5
Classic	52/41	20,5/16,1	165-170	140-151	539/686	524/667	520/410	405	411	270/270	125	587	1680	43	64,3	769/679	381/548	551/500	72,0	74,0/74,5
V design	52/46	20,5/18,1	165-170	149-151	539/686	524/676	520/460	405	411	270/270	125	587	1680	43	64,3	749/707	381/548	551/500	72,0	74,0/74,5
V design	52/50	20,5/19,7	165-170	157-164	539/705	524/704	520/500	405	411	270/270	125	587	1699	43	64,3	735/728	381/567	551/500	72,0	74,0/74,5
Classic	54/46	21,3/18,1	171-175	149-151	549/686	537/671	540/460	405	411	270/270	125	597	1690	43	64,3	778/713	391/542	551/519	72,0	74,0/74,5
V design	54/50	21,3/19,7	171-175	157-164	549/705	537/699	540/500	405	411	270/270	125	597	1709	43	64,3	762/737	391/561	551/519	72,0	74,0/74,5
V design	54/52	21,3/20,5	171-175	165-170	549/712	537/709	540/520	405	411	270/270	125	597	1710	43	64,3	755/746	391/563	551/519	72,0	74,0/74,0
Classic	56/50	22,0/19,7	176-178	157-164	560/705	550/694	560/500	405	411	270/270	125	598	1715	43	61,2	788/743	396/556	552/537	72,5	73,5/74,5
V design	56/52	22,0/20,5	176-178	165-170	560/712	550/705	560/520	405	411	270/270	125	598	1717	43	61,2	780/755	396/558	552/537	72,5	73,5/74,0
V design	56/54	22,0/21,3	176-178	171-175	560/712	550/710	560/540	405	411	270/270	125	598	1717	43	61,2	773/765	396/558	552/537	72,5	73,5/74,0
Classic	58/52	22,8/20,5	178-182	165-170	571/712	561/700	580/520	405	411	270/270	145	610	1728	43	61,2	807/763	402/553	571/556	72,5	73,5/74,0
V design	58/54	22,8/21,3	178-182	171-175	571/712	561/705	580/540	405	411	270/270	145	610	1728	43	61,2	799/774	402/553	571/556	72,5	73,5/74,0
V design	58/56	22,8/22,0	178-182	176-178	571/738	561/736	580/560	405	411	270/270	145	604	1749	43	61,2	791/783	396/574	571/555	72,5	73,0/73,5
Classic	60/54	23,6/21,3	183-188	171-175	583/712	572/701	600/540	405	411	270/270	165	616	1741	43	61,2	826/780	402/548	591/574	72,5	73,0/74,0
V design	60/56	23,6/22,0	183-188	176-178	583/738	572/731	600/560	405	411	270/270	165	616	1761	43	61,2	817/792	402/568	591/574	72,5	73,0/73,5
V design	60/58	23,6/22,8	183-188	178-182	583/738	572/735	600/580	405	411	270/270	165	616	1756	43	61,2	810/802	402/563	591/574	72,5	73,0/73,0
Classic	62/56	24,4/22,0	189-195	176-178	595/738	584/725	620/560	405	411	270/270	185	628	1774	43	61,2	845/799	409/563	610/593	72,5	73,0/73,5
V design	62/58	24,4/22,8	189-195	178-182	595/738	584/730	620/580	405	411	270/270	185	628	1768	43	61,2	837/811	409/557	610/593	72,5	73,0/73,0
V design	62/60	24,4/23,6	189-195	183-188	595/738	584/735	620/600	405	411	270/270	185	628	1768	43	61,2	830/821	409/557	610/593	72,5	73,0/73,0

* [1] - pilot, [2] - stoker