




Big Bang Track Geometry



Classic



V design

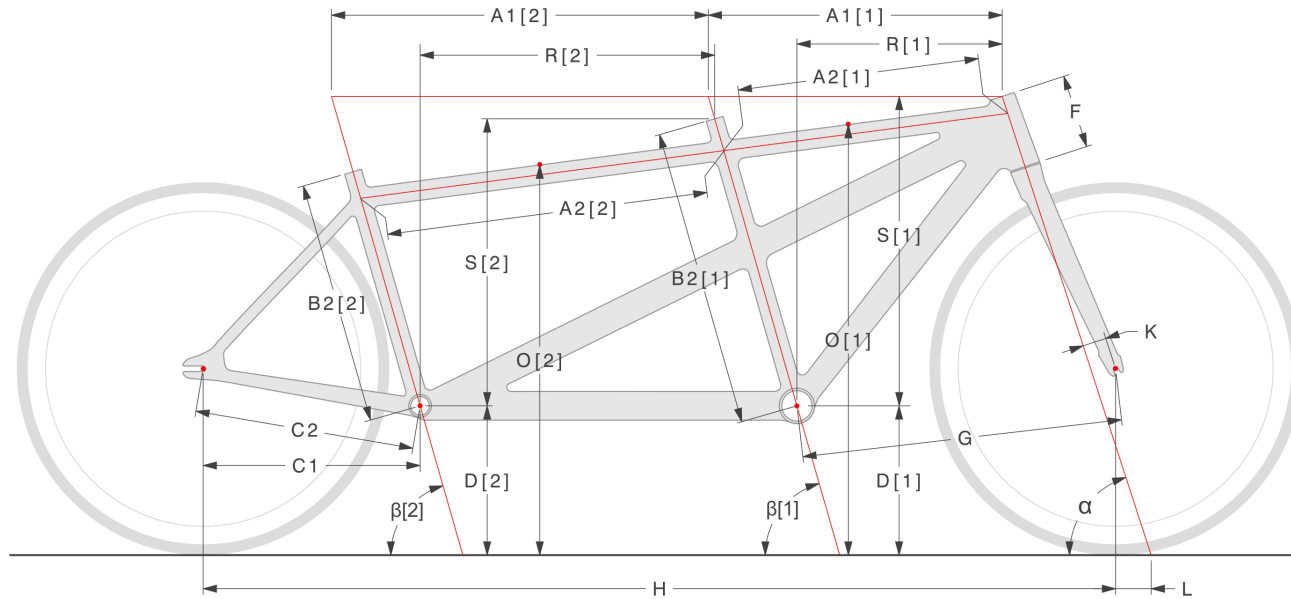

Wheels 23-622 (700x23C)

Frame design	Frame size [1]/[2]		Typical Rider Height	Typical Rider Height	Effective Top Tube Length	Actual Top Tube Length	Seat Tube Length to Top	Effective Chainstay Length	Actual Chainstay Length	Bottom Bracket Height	Head Tube Length	Front Center Distance	Wheelbase	Fork Rake	Trail	StandOver Midpoint	Reach	Stack	Head Tube Angle	Seat Tube Angle
	cm	inch	VP[1] (cm)	VP[2] (cm)	A1[1]/[2] (mm)	A2[1]/[2] (mm)	B2[1]/[2] (mm)	C1 (mm)	C2 (mm)	D[1]/[2] (mm)	F (mm)	G (mm)	H (mm)	K (mm)	L (mm)	O[1]/[2] (mm)	R[1]/[2] (mm)	S[1]/[2] (mm)	α (deg)	β[1]/[2] (deg)
V design	50/48	19,7/18,9	161-165	155-160	534/672	520/669	500/480	386	390	282/282	125	588	1643	41	63,3	730/722	389/543	541/483	72,5	75,0/75,0
V design	52/48	20,5/18,9	166-170	155-160	544/672	532/665	520/480	386	390	282/282	125	593	1649	41	60,2	757/731	399/537	543/502	73,0	75,0/75,0
V design	52/50	20,5/19,7	166-170	161-165	544/686	532/683	520/500	386	390	282/282	125	593	1663	41	60,2	750/741	399/551	543/502	73,0	75,0/75,0
Classic	54/47	21,3/18,5	171-175	155-158	555/672	546/659	540/471	386	390	282/282	125	604	1660	41	60,2	787/735	410/532	543/522	73,0	75,0/75,0
V design	54/50	21,3/19,7	171-175	161-165	555/686	546/679	540/500	386	390	282/282	125	604	1674	41	60,2	776/750	410/546	543/522	73,0	75,0/75,0
V design	54/52	21,3/20,5	171-175	166-170	555/705	546/702	540/520	386	390	282/282	125	604	1693	41	60,2	769/760	410/565	543/522	73,0	75,0/75,0
Classic	55/49	21,7/19,3	173-177	158-162	560/672	552/662	550/492	386	390	282/282	125	604	1665	41	60,2	792/750	410/530	543/530	73,0	74,5/75,0
Classic	56/52	22,0/20,5	176-180	166-170	566/705	560/697	560/514	386	390	282/282	125	610	1704	41	60,2	796/766	416/560	543/540	73,0	74,5/75,0
V design	56/54	22,0/21,3	176-180	171-175	566/712	560/710	560/540	386	390	282/282	125	610	1711	41	60,2	787/779	416/567	543/540	73,0	74,5/75,0
Classic	57/52	22,4/20,5	178-182	166-170	571/705	564/697	570/522	386	390	282/282	135	610	1704	41	57,1	807/774	417/558	554/549	73,5	74,5/75,0
Classic	58/53	22,8/20,9	178-185	168-172	577/705	570/697	580/532	386	390	282/282	145	617	1710	41	57,1	816/784	421/555	564/559	73,5	74,5/75,0
V design	58/55	22,8/21,7	178-185	173-178	577/717	570/712	580/550	386	390	282/282	145	617	1717	41	57,1	810/793	421/562	564/559	73,5	74,5/74,5
Classic	60/55	23,6/21,7	186-193	173-178	589/717	582/709	600/553	386	390	282/282	165	629	1735	41	57,1	836/804	427/562	583/578	73,5	74,5/75,0
V design	60/58	23,6/22,8	186-193	179-185	589/738	582/735	600/580	386	390	282/282	165	629	1750	41	57,1	826/817	427/578	583/578	73,5	74,5/74,5

* [1] - pilot, [2] - stoker