
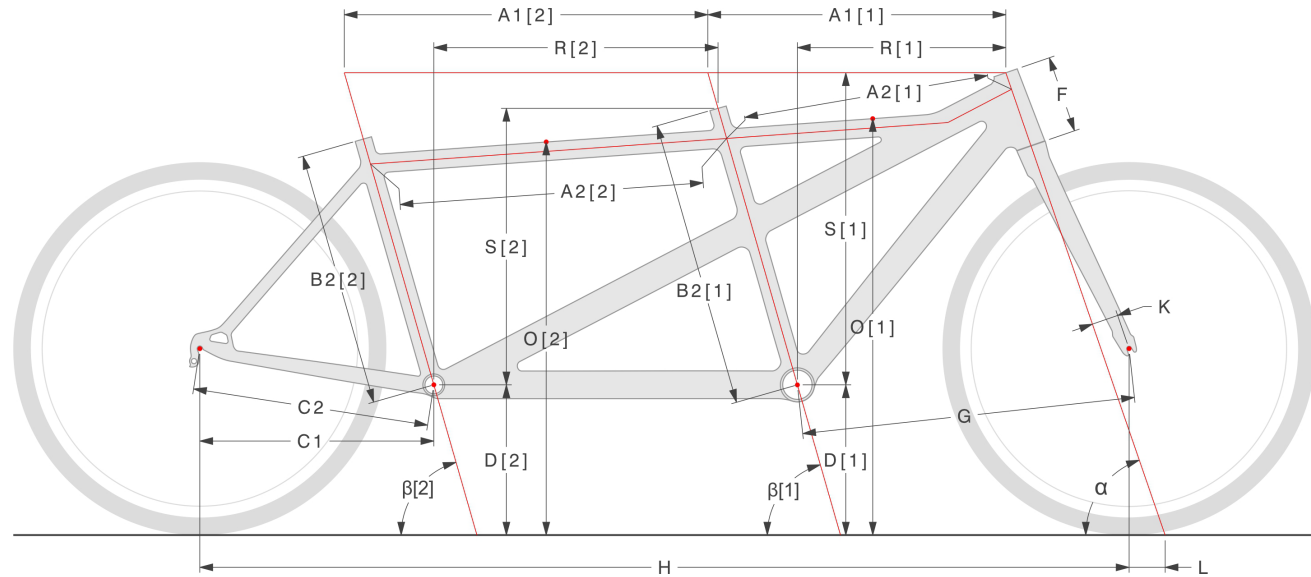


# Big Bang Treking Geometry



Wheels 37-622 (700x35C)

Frame design	Frame size [1]/[2]		Typical Rider Height	Typical Rider Height	Effective Top Tube Length	Actual Top Tube Length	Seat Tube Length to Top	Effective Chainstay Length	Actual Chainstay Length	Bottom Bracket Height	Head Tube Length	Front Center Distance	Wheelbase	Fork Rake	Trail	StandOver Midpoint	Reach	Stack	Head Tube Angle	Seat Tube Angle
	cm	inch	VP[1] (cm)	VP[2] (cm)	A1[1]/[2] (mm)	A2[1]/[2] (mm)	B2[1]/[2] (mm)	C1 (mm)	C2 (mm)	D[1]/[2] (mm)	F (mm)	G (mm)	H (mm)	K (mm)	L (mm)	O[1]/[2] (mm)	R[1]/[2] (mm)	S[1]/[2] (mm)	α (deg)	β[1]/[2] (deg)
V design	46/40	18,1/15,7	165-171	153-161	544/686	525/676	460/400	439	444	282/282	125	615	1741	50	70,9	712/661	382/565	566/442	70,5	74,0/74,5
V design	48/42	18,9/16,5	172-176	162-166	552/712	533/702	480/420	439	444	282/282	135	623	1776	50	70,9	723/681	387/585	575/461	70,5	74,0/74,5
V design	50/42	19,7/16,5	177-183	162-166	559/712	539/698	500/420	439	444	282/282	145	626	1779	50	67,6	749/690	391/580	586/481	71,0	74,0/74,5
V design	50/46	19,7/18,1	177-183	167-171	559/725	539/717	500/460	439	444	282/282	145	626	1786	50	67,6	735/710	391/587	586/481	71,0	74,0/74,0
V design	54/44	21,3/17,3	184-189	164-170	574/712	555/693	540/440	439	444	282/282	165	642	1789	50	67,6	796/718	400/563	605/519	71,0	74,0/74,0
V design	54/48	21,3/18,9	184-189	172-176	574/739	555/727	540/480	439	444	282/282	165	642	1816	50	67,6	781/738	400/590	605/519	71,0	74,0/74,0
Classic	58/45	22,8/17,7	190-198	165-171	589/725	571/701	580/448	439	444	282/282	185	658	1818	50	67,6	846/740	410/565	624/558	71,0	74,0/74,0
V design	58/50	22,8/19,7	190-198	177-181	589/739	572/723	580/500	439	444	282/282	185	658	1832	50	67,6	827/766	410/579	624/558	71,0	74,0/74,0
Classic	60/47	23,6/18,5	199-204	171-176	604/739	586/715	600/467	439	444	282/282	205	668	1843	50	64,4	866/758	419/574	645/577	71,5	74,0/74,0

\* [1] - pilot, [2] - stoker

© DURATEC GeoVersion 16.1