


Rebel S8 Geometry

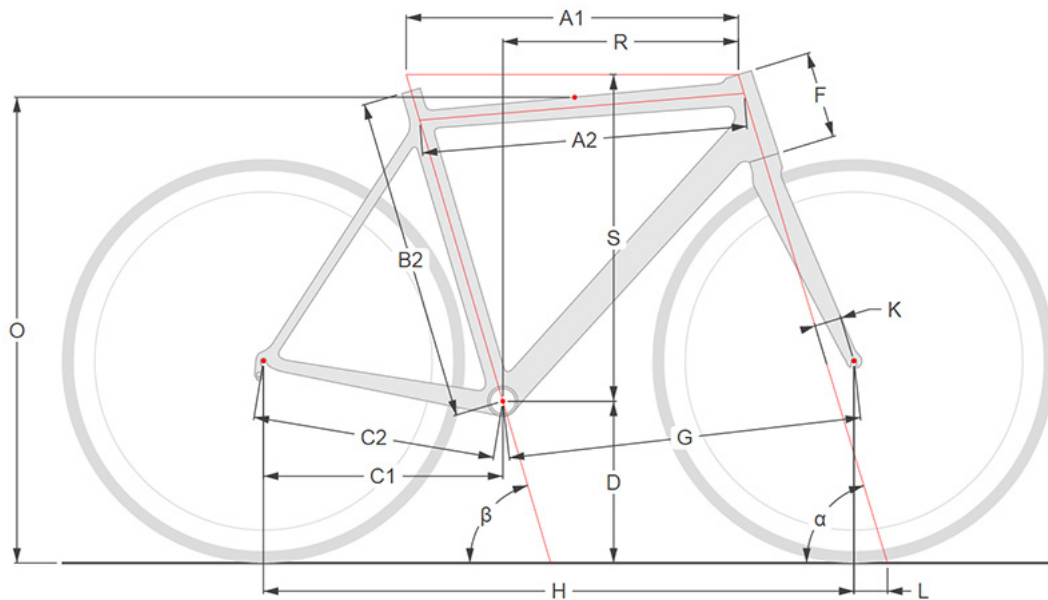

Men

Frame size VR		Typical Rider Height	Effective Top Tube Length	Actual Top Tube Length	Seat Tube Length to Top	Effective Chainstay Length	Actual Chainstay Length	Bottom Bracket Height	Head Tube Length	Front Center Distance	Wheelbase	Fork Rake	Trail	StandOver Midpoint	Reach	Stack	Head Tube Angle	Seat Tube Angle
cm	inch	VP (cm)	A1 (mm)	A2 (mm)	B2 (mm)	C1 (mm)	C2 (mm)	D (mm)	F (mm)	G (mm)	H (mm)	K (mm)	L (mm)	O (mm)	R (mm)	S (mm)	α (deg)	β (deg)
50	19,7	161-162	530	519	500	421	426	280	105	593	1011	45	72,2	762	384	528	71,0	74,5
51	20,1	163-165	535	525	510	421	426	280	105	594	1011	45	69,0	768	388	529	71,5	74,5
52	20,5	166-167	540	529	520	421	426	280	115	594	1011	45	69,0	777	386	539	71,5	74,0
53	20,9	168-170	545	534	530	421	426	282	125	595	1013	45	65,8	788	388	548	72,0	74,0
54	21,3	171-172	550	538	540	421	426	282	135	596	1013	45	65,8	797	385	558	72,0	73,5
55	21,7	173-175	555	543	550	421	426	282	145	601	1018	45	65,8	807	387	567	72,0	73,5
56	22,0	176-177	565	552	560	421	426	282	155	606	1023	45	62,5	817	394	578	72,5	73,5
57	22,4	178-180	575	561	570	421	426	282	165	611	1028	45	62,5	826	395	588	72,5	73,0
58	22,8	181-182	585	571	580	421	426	282	175	621	1038	45	62,5	836	402	598	72,5	73,0
59	23,2	183-185	595	582	590	421	426	285	185	631	1049	45	62,5	847	410	604	72,5	73,0
60	23,6	186-187	600	587	600	421	426	285	195	636	1054	45	62,5	856	412	614	72,5	73,0
61	24,0	188-190	605	592	610	421	426	285	205	641	1059	45	62,5	866	414	623	72,5	73,0
62	24,4	191-192	610	597	620	421	426	285	215	646	1064	45	62,5	876	417	633	72,5	73,0